


SINGLE DUCT TERMINAL UNIT WITH INTEGRAL ELECTRIC COIL LSEA

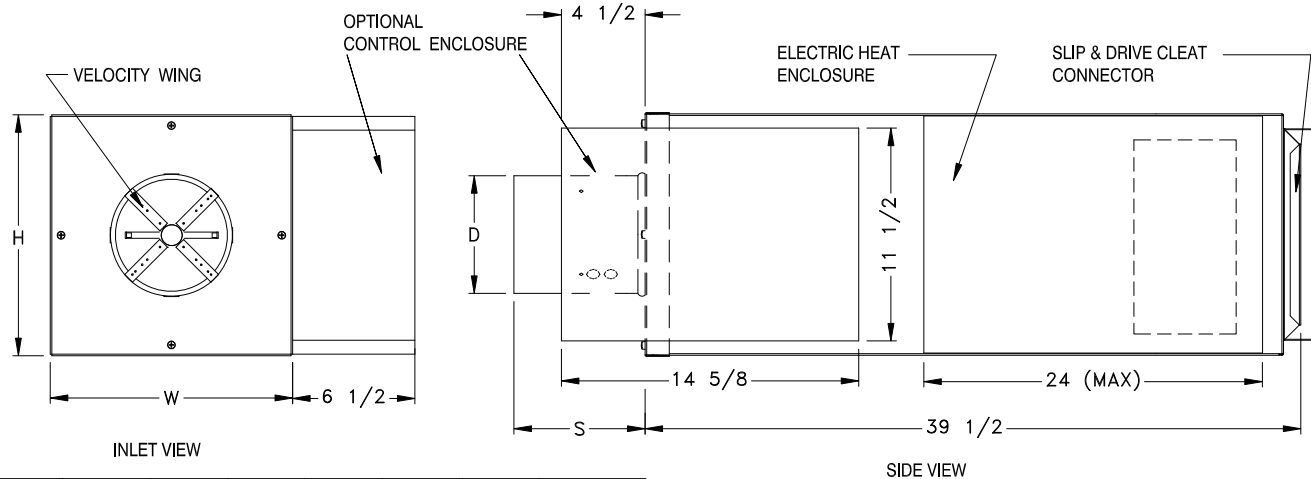


SIZE	D	W	H	X	Y	S	WEIGHT
05	4 7/8	10	10	8 3/4	8 3/4	5 3/8	32 LBS
06	5 7/8	10	10	8 3/4	8 3/4	5 3/8	32 LBS
07	6 7/8	12	10	10 3/4	8 3/4	5 3/8	35 LBS
08	7 7/8	12	10	10 3/4	8 3/4	5 3/8	35 LBS
09	8 7/8	14	12 1/2	12 3/4	11 1/4	5 3/8	42 LBS
10	9 7/8	14	12 1/2	12 3/4	11 1/4	5 3/8	42 LBS
12	11 7/8	16	15	14 3/4	13 3/4	5 3/8	47 LBS
14	13 7/8	20	17 1/2	18 3/4	16 1/4	5 3/8	55 LBS
16	15 7/8	24	17 1/2	22 3/4	16 1/4	5 3/8	61 LBS
24x16	24x16	38	18	38	18	5 7/16	127 LBS

NOTES:

- WEIGHT ARE AN ESTIMATION AND WILL VARY BASED ON SELECTED OPTIONS, INSULATION TYPE, ETC.
- 36" CLEARANCE REQUIRED BY NEC FOR ELECTRICAL ENCLOSURES.
- MINIMUM 70 CFM PER KW REQUIRED.

STANDARD FEATURES:

- ETL LISTED.
- PERFORMANCE CERTIFIED UNDER ARI STANDARDS 880 AND 410.
- HEAVY GAUGE ZINC COATED STEEL, MECHANICAL LOCKING SEAMS CONSTRUCTION.
- INSULATION MEETS REQUIREMENTS OF NFPA AND UL.
 - STANDARD 1" THICK MATTE-FACED DUAL DENSITY GLASS FIBER INSULATION
 - 3/8" CLOSED CELL "HOSPITAL" GRADE INSULATION
 - METAL LINER DOUBLE WALL CONSTRUCTION FIBER-LOK INSULATION
- ROUND DAMPER WITH LEAK-RESISTANT PERIMETER SEAL.
- SLIP AND DRIVE CLEAT CONNECTIONS ON RECTANGULAR DISCHARGE.
- RIGHT OR LEFT HAND CONTROL LOCATION.
- MULTI - POINT CENTER AVERAGING AIR FLOW SENSOR USING LOG - LINEAR METHOD ADOPTED BY ARI AND AMCA.
- GAUGE TEES FOR AIR FLOW MEASUREMENT.
- ACTUATOR _____
- SOLID ONE PIECE DAMPER SHAFT.

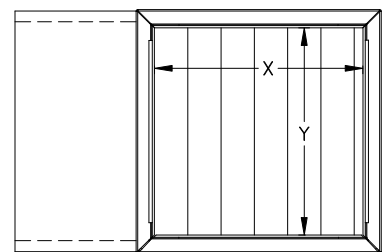

DISCHARGE VIEW

All Dimensions are in Inches



Laboratory Control Systems Incorporated
91 Quinton Road
Scott Township, PA 18447
Tel: 570.487.2490 Fax: 570.487.2494
www.labcontrols.com

Title:
SINGLE DUCT TERMINAL UNIT WITH
INTEGRAL ELECTRIC COIL

Model Number:
LSEA

Drawing Number:
LSEA-DS

Date:
02/05/2020

Rev. B