PROCESS CHILLED WATER SYSTEM ALARM
PCW-ALM

GENERAL DESCRIPTION

The PCW-ALM features a series 92 sealed actuator with green and red LEDs that can be powered by 24VDC or 24VAC.

Module Functions as Follows:

- PCW System Off: No LED

Depress switch to activate system

- PCW System On: Status LED green

Depress switch again to de-activate system

- Alarm condition: Status LED red

Depress switch to reset system and clear alarm..

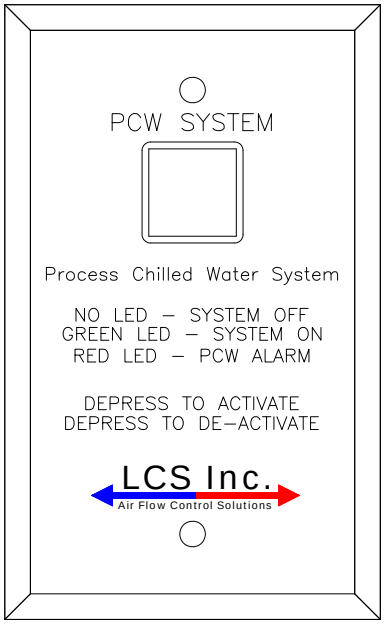

SPECIFICATIONS

MODEL NO.: PCW-ALM
DRY CONTACT: Rated @ 42VDC / 50 mADC
STATUS INDICATION:
Visual: System On - Green LEDs
System Alarm - Red LEDs
LEDs can be driven from 24VDC or 24VAC
CONNECTION: 5-conductor
MOUNTING: 2” x 3 x 2” cut-out (single gang Junction box - by LCS)
DIMENSIONS: Face plate: 2 3/4” x 4 1/2”
ORDERING INFORMATION: Model number PCW-ALM

LCS Inc.
Air Flow Control Solutions
Laboratory Control Systems Incorporated
91 Quinton Road
Scott Township, PA 18447
Tel: 570.487.2490 Fax: 570.487.2494
www.labcontrols.com

Title: Process Chilled Water System Alarm
Model Number: PCW-ALM
Drawing Number: PCW-ALM-DS
Date: 2/4/2020
Rev. A